




- Sanitary Napkins
- Panty Liners
- Baby Diaper
- Adult Diapers
- Other Products
- PDF Catalogue



Product Line

[>> Back](#)

YX-HY-180C Type Double Routes Forming Fast-Easy Package Winged Sanitary Napkin Production Line

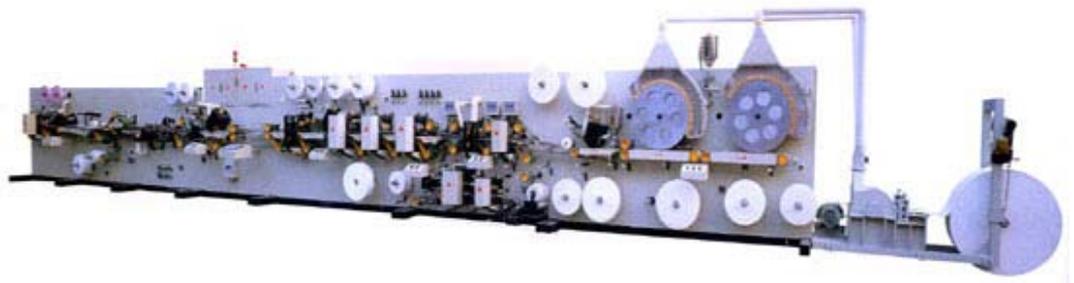

Function & Assemble Parts:

1. It can produce ultra-thin type (silk thin type), cotton core type economical or stereo-protection sanitary napkin with center protrusion. The small package is in fast-easy package.
2. Cotton core is laid out by model/wheel or net wheel. Net wheel cotton core is in package type. Model wheel or net wheel can be in separate production. As per request, it can produce ultra-thin cotton core sanitary napkin.
3. Without net wheel or model wheel, it can produce air-laid paper ultra-thin sanitary napkin.
4. Model wheel, cotton core and SAP are mixed and sprayed. Net wheel cotton core SAP can choose mixed or positioned spraying.
5. Material of stereo-protection and three-piece style are molding on the machine. The surface material is with hitting dot on short-cut guide-flow cloth. Stereo U type can be adjustable.

Structure & Character:

1. Pulp laying & absorbing from model wheel are advanced in designing: GSM of cotton core is accurate and spraying gap is unite.
2. Driving system consists of gearwheel box, universal couplings and arc gear synchronous belt with high driving accuracy and high mechanical efficiency.
3. Equipment is combined by sections, bracket is welded by square steel tube with good stability.
4. Driving components are installed in the backboard of equipment to both avoid shake during operation and facilitate the maintenance.
5. Material stuffer is in manual expanding with convenient material stuffing and accurate positioning.
6. Conveyance of jumbo roll in manufacturing uses vacuum absorption to stable tension of material in operation.
7. Molding and positioning procedure of products are equipped with electric differential device to conduct regulation without stopping machine.

Main Technical Parameter:

1. Designed production speed: 550PCS/min
2. Stadle Production speed:
Without package 400~500PCS/min
Fast-easy packaging 350~450PCS/min
3. Machine power: 95Kw (380V 50Hz)(Include glue applicators.)
4. Overall size of equipment (L x W x H m): 22 x 2.2 x 2.25
5. Weight of equipment: about 23 t

Add: B Unit, 16 Floor, Jinyuan Bldg, Hubin South No.57, Xiamen 361004, China
Tel: (86)592 2207316 Fax: (86)592 2226816(manual)
Email: diapers@manufacturer.sina.net yuxiang@manufacturer.sina.net